

CURRENT 1.0 Ampere
 VOLTAGE RANG 200 to 600 Volts


RMB12F THRU RMB16F

Features

- Low profile space
- Ideal for automated placement
- Glass passivated chip junction
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering:
260°C/10 seconds at terminals
- Component in accordance to
RoHS 2002/95/1 and WEEE 2002/96/EC

Mechanical Date

- Case: MBF Molded plastic over glass passivated chip
- Terminals: Solder plated, solderable per J-STD-002B and JESD22-B102D
- Polarity: Polarity symbols marked on body

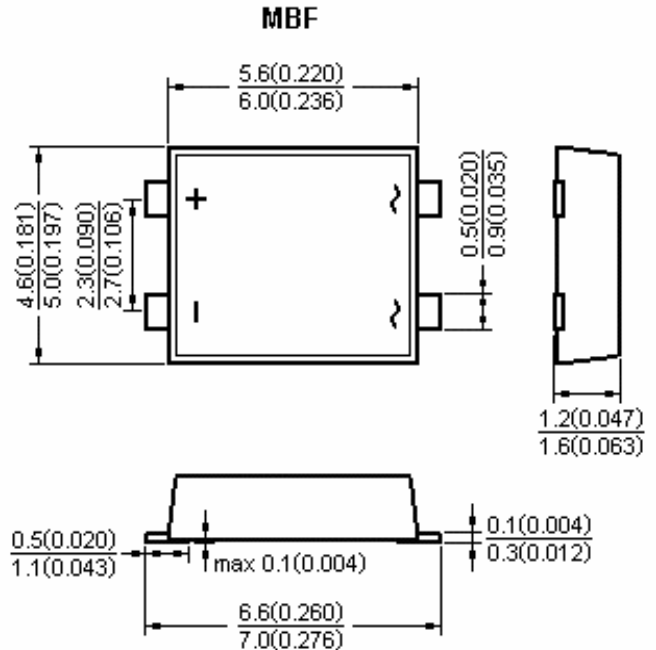

Dimensions in millimeters and (inches)

Maximum Ratings & Thermal Characteristics & Electrical Characteristics

($T_A = 25^\circ\text{C}$ unless otherwise noted)

	Symbol	RMB12F	RMB14F	RMB16F	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	V
Maximum RMS voltage	V_{RMS}	140	280	420	V
Maximum DC blocking voltage	V_{DC}	200	400	600	V
Maximum average forward output rectified current at $T_A=30^\circ\text{C}$	$I_{F(AV)}$	1			A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load(JEDEC Method)	I_{FSM}	30			A
Maximum instantaneous forward voltage drop per leg at 1.0A	V_F	1.25			V
Maximum DC reverse current at $T_A = 25^\circ\text{C}$ rated DC blocking voltage per leg $T_A = 125^\circ\text{C}$	I_R	5.0 100			μA
Maximum reverse recovery time at $I_F = 0.5\text{ A}$, $I_R = 1.0\text{ A}$, $I_{rr} = 0.25\text{ A}$	t_{rr}	150		250	nS
Thermal resistance per leg (Note:1)	$R_{\theta JA}$	80			$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150			$^\circ\text{C}$

NOTE1: Units mounted on P.C.B. with 0.05×0.05" (1.3×1.3mm) pads

CURRENT 1.0 Ampere
 VOLTAGE RANG 200 to 600 Volts

RMB12F THRU RMB16F

Rating and Characteristic Curves ($T_A=25^{\circ}\text{C}$ Unless otherwise noted)

Fig.1 Derating Curve For Output Rectified Current

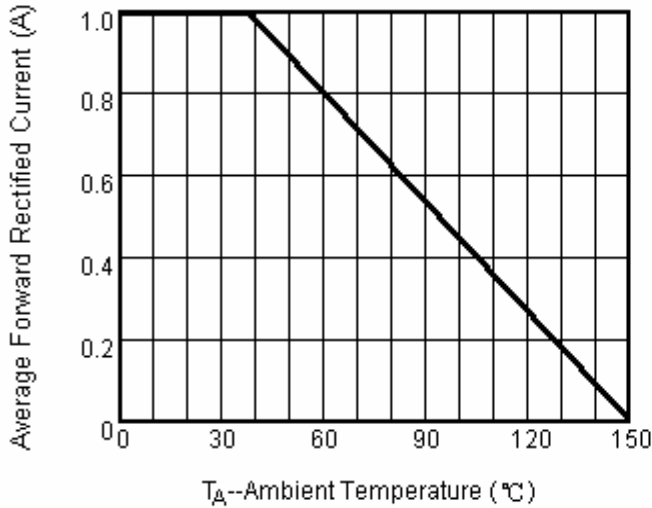


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current Per Leg

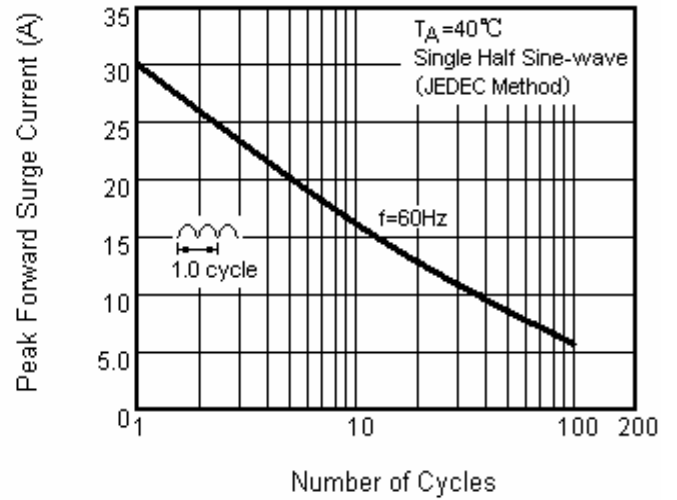


Fig.3 Typical Forward Voltage Characteristics Per Leg


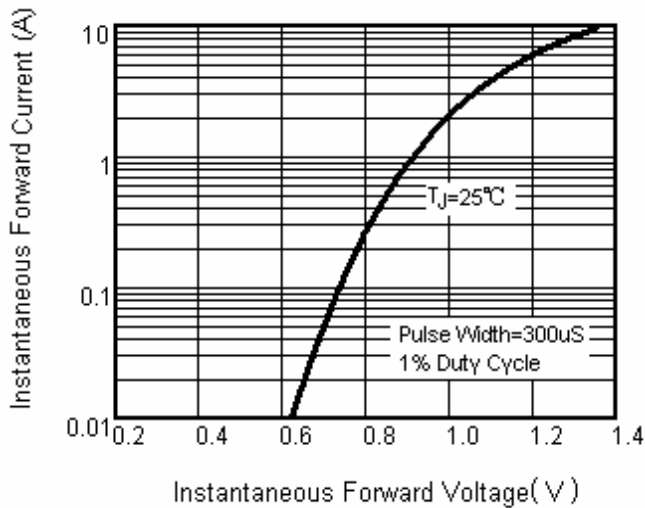



Fig.4 Typical Reverse Leakage Characteristics Per Leg

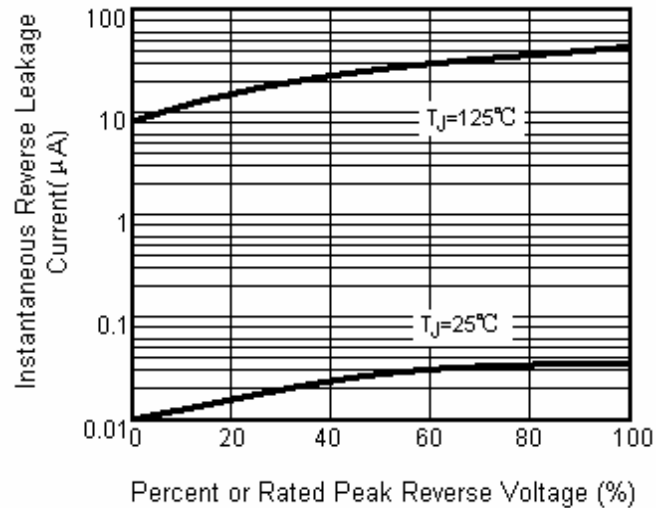


CURRENT 1.0 Ampere
 VOLTAGE RANG 200 to 600 Volts

RMB12F THRU RMB16F

Usbam mould

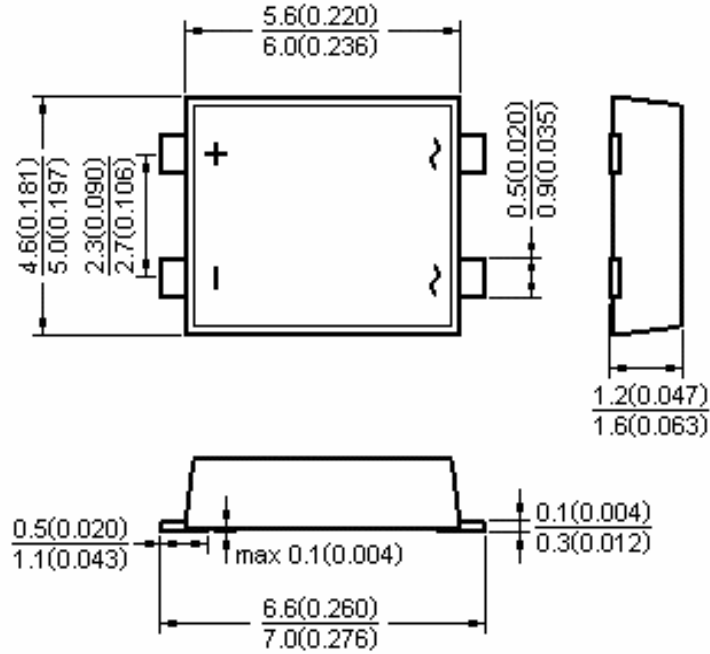

The body mold

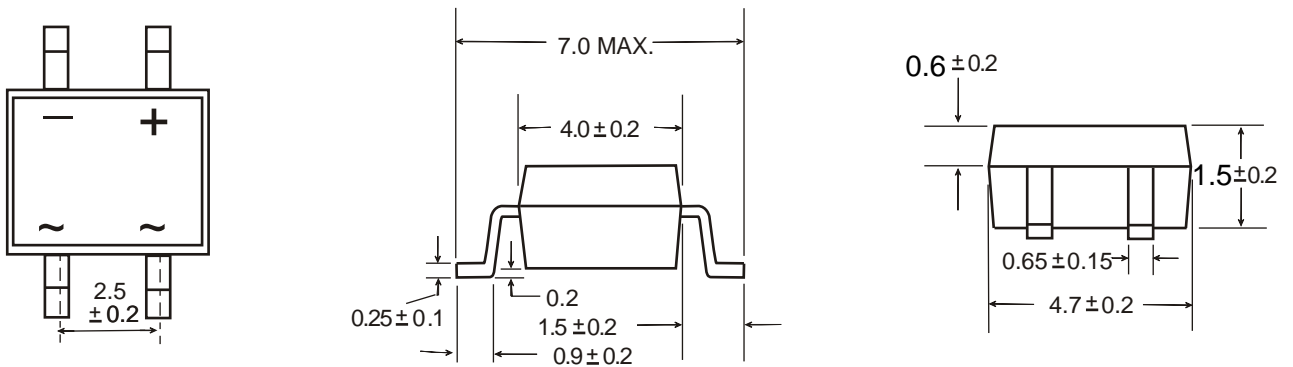

Dimensions in millimeters(1mm =0.0394")